Hills® Clothesline Installation

How to install your Clothesline

Folding Head Hoists
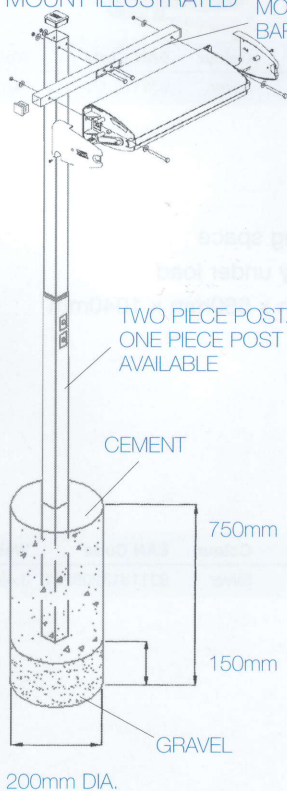
CHECK FOR LEVEL

0.5m
0.5m

MAIN STANDARD

CLOSE TABS TO KEEP CLEAR OF CONCRETE

LOCKING COLLAR ENGAGE IN GROUND SOCKET ROTATE TO LOCK

SOCKET MAXIMUM 6mm ABOVE GROUND LEVEL

GROUND SOCKET

440mm CONCRETE
650mm
210mm DRY GRAVEL

250mm
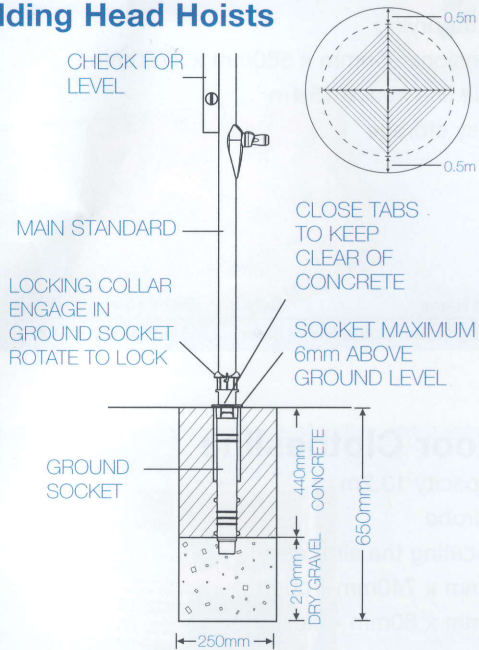
Folding Frame Clotheslines

POST MOUNTED. NOTE: POST MOUNTING KIT IS AN OPTIONAL EXTRA.
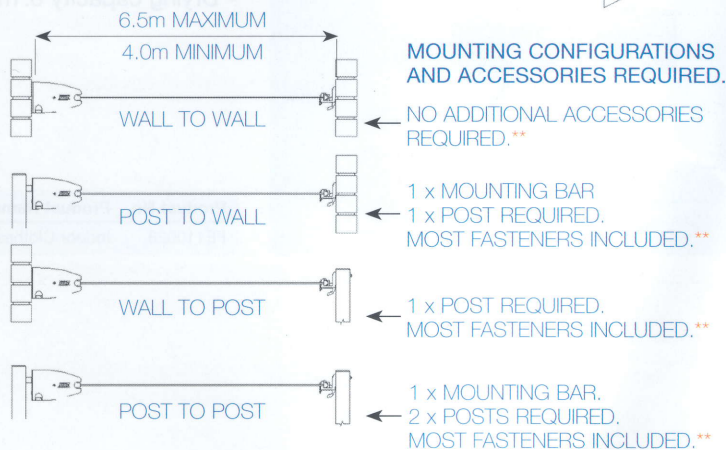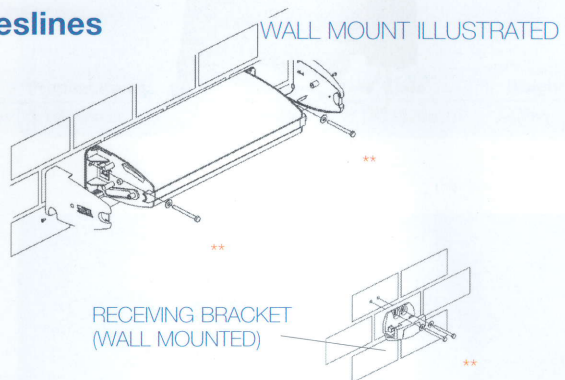
WALL MOUNTED

POST IS CONCRETED INTO THE GROUND
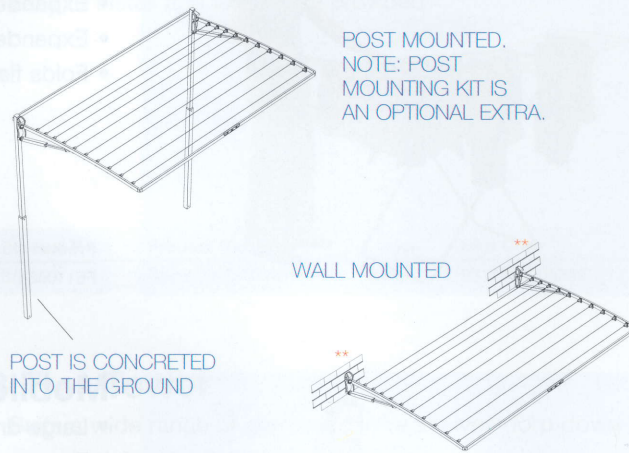
** MASONRY ANCHORS ARE SUPPLIED. CONSULT YOUR HARDWARE SPECIALIST IF YOU NEED FASTENERS TO SUIT YOUR PARTICULAR APPLICATION.

Retracting Clotheslines

POST MOUNT ILLUSTRATED

MOUNTING BAR

WALL MOUNT ILLUSTRATED

RECEIVING BRACKET (POST MOUNTED)

RECEIVING BRACKET (WALL MOUNTED)

TWO PIECE POST. ONE PIECE POST AVAILABLE

CEMENT

750mm

150mm

GRAVEL

200mm DIA.

POST INSTALLATION DETAILS
OPTIONAL GROUND SOCKET IS AVAILABLE.

6.5m MAXIMUM
4.0m MINIMUM

WALL TO WALL

POST TO WALL

WALL TO POST

POST TO POST

MOUNTING CONFIGURATIONS AND ACCESSORIES REQUIRED.

NO ADDITIONAL ACCESSORIES REQUIRED.**

1 x MOUNTING BAR
1 x POST REQUIRED.
MOST FASTENERS INCLUDED.**

1 x POST REQUIRED.
MOST FASTENERS INCLUDED.**

1 x MOUNTING BAR.
2 x POSTS REQUIRED.
MOST FASTENERS INCLUDED.**

** MASONRY ANCHORS NOT SUPPLIED. CONSULT YOUR HARDWARE SPECIALIST FOR ANCHORS TO SUIT YOUR PARTICULAR APPLICATION.

IMPORTANT: Refer to Owner's Manual for full installation instructions. **NOTE:** Cement, sand and gravel are not included.